



# An Adaptive Image Dehazing Algorithm Based On Dark Channel Prior

Archana Paliwal, Department of Computer Science & Engineering, RDEC, Ghaziabad. [bhargav01@gmail.com](mailto:bhargav01@gmail.com)

## Abstract

In this study, we provide a novel rapid alternative method for simultaneous dehaze and denoise. The suggested method begins by estimating a transmission map using a home windows adaptive strategy that is built on the renowned dark channel prior. By using this transmission map, the threshold artefact in the final image may be significantly reduced, and the estimate accuracy can be improved. Next, the transmission map is converted to an intensity map. This will be used to build the new version model, which will seek for the final picture free of haze and noise. Similarly, it is highlighted that the suggested variant model has a minimiser and that it is a strong feature. We guarantee convergence of the set of laws and design a numerical procedure based on the Chambolle-Pock set of rules. Extensive results from real-world experiments show that our technology can effectively recover high-quality, contrast-free images free of haze and noise.


**Keywords:** Dehaze, Denoise, Adaptive, Chambolle-Pock algorithm

## INTRODUCTION

The weather is terrible, and the external scenery is deteriorating due to haze, mist, fog, and smoke. It alters the tones and decreases the contrast of regular photos, it makes scenes less visible, and it poses a serious threat to the dependability of numerous applications, such as outdoor surveillance and object detection. It also reduces the clarity of satellite TV for laptop photos and underwater snapshots. Photographers find this a frustrating and annoying problem. Eliminating haze from images is therefore a highly sought-after and critical area of image processing. Light is scattered before it reaches the camera due to the vast amounts of these particles in the environment, which distorts the outside picture. As it mixes with additional light in the surroundings, haze weakens the meditated light from the scenes. This imagined light (i.e., scene colours) is often enhanced from mixed light by haze reduction procedures. Using this efficient haze removal of picture may also advance the visual system's consistency and power. Polarisation independent problem analysis and dark channel earlier are only two of the many methods available for removing image noise. It is common for ambient light to disperse before reaching the camera lens, and for any digital camera lens to mix with ambient light, all because of the existence of the surroundings. Picture quality deterioration, such as increased noise, reduced intensity contrast, and inconsistent colour, is unavoidable as a consequence. This kind of deterioration becomes much worse under unfavourable weather conditions, such as when there are aerosols together with haze, fog, rain, dirt, or odours. For example, fog is a common climatic phenomena that may also cause noise and ambiguity via the albedo effect. The ability to understand and extract information from the images is somewhat hindered by these occurrences. Consequently, there is an immediate need for denoising and haze removal techniques in practical applications. There is a lot of interest in imaging technology right now for dehazing and denoising images of natural scenes. The benefits of these procedures are pure. For starters, photo fusion, feature extraction, and segmentation are just a few of the many important applications that benefit greatly from haze-and noise-free photos. Secondly, the images themselves are more aesthetically pleasing and vibrant. Photo dehazing is a lot of work, nevertheless, since the haze usually depends heavily on unknown intensity data. Input facts consisting of only one picture could make the issue more ill-posed. Machine vision, meteorology, optics, and even certain parts of computer photos are all involved in the multidisciplinary process of image dehazing. Fog and haze are visual diversity restrictors in the environment, and they may significantly lower the evaluation of the target situations.



**BLOCK DIAGRAM**

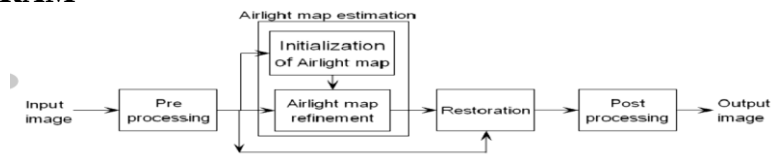

**Fig 1 Block diagram of Proposed Haze removal model**

**The main Objectives will be:**

Among our contributions are a windows adaptive technique for transmission map estimation, a novel energy model for simultaneous dehazing and denoising, and a description of the minimizer of the suggested energy functional, as well as its existence and uniqueness.

The presented weighted vectorial total variation framework is novel and potentially applicable, as far as we are aware; This project contains several parts and, as a result, various important goals.

Accept as input any haze-polluted RGB image that the user specifies.

Identify contaminated locations with a high degree of accuracy.

Before proceeding, dehaze the picture by using the dark channel.

Keep all calculations to a reasonable duration (ideally, less than 30 seconds for a 800x600 pixel picture).

**Research Methodology/Planning of Work**

A large number of research projects have relied on the dark channel prior approach, which has become an algorithm that is widely used to enhance blurry photos. In foggy conditions, for instance, a video app may utilise the dark channel beforehand to identify fog from traffic scenes. The dark channel has also been extended in the past to enhance underwater video and film quality. Improvements to the present dark channel previous technique have also been considered. For example, by using contrast enhancement to boost colour contrast with less colour distortion, the dark channel previous approach was made better. To this day, the dark channel previous method's calculation time remains unaddressed. The dark channel prior algorithm's soft matting function is In particular, we design an optimisation technique that optimises the time it takes to clear up foggy photos by balancing a device of three bilateral filters with the dark channel before. In order to determine whether an image is foggy or not, the experimental results show that the suggested approach correctly identifies areas with low contrast to the sky region. While we did strive to enhance the overall performance of the dark channel using the previous technique, we did not prioritise the quality of the output photographs above removing undesirable artefacts. The results are far faster than the old-fashioned dark channel method; presently, for a 800x600 pixel picture, the speed is about 12 seconds.

Lastly, previous approaches said that their methods were effective on photographs contaminated by smoke, fog, haze, etc., nevertheless, methods never examined experimental outcomes using photographs that were not foggy. We based our method on pictures taken in both clear and hazy conditions, as well as those contaminated with smoke and steam. We used improved Matlab code for a dark channel to carry out our studies. Additionally, the directed joint filter in the bilateral filtering process was implemented using Matlab code from. For the time being, we'll keep the code running in Matlab as it's a reliable tool for computational photography. Overall, to carry out the dehazing procedure and algorithm to finish the three-stage bilateral filtering procedure. The processes and their respective roles in creating haze-free photos are detailed below. Prior to the project, we captured photographs in the field to utilise as test images in our studies. Smoke, steam, or haze contaminates the images. While smoke contaminated the input picture used in this section, the outcomes would remain same when dealing with a foggy or steamy image. Haze reduction solutions are currently needed by many computer vision-based applications.



Unfortunately, there is no silver bullet and many important elements have been overlooked in the present methods. Findings from the survey shed light on issues that the offered solutions, such as noise reduction techniques, had overlooked.

Another challenge for dehazing technologies is dealing with uneven and too much light. Therefore, current approaches need improvement in order to function better. To get superior results, one may use a combination algorithm that incorporates a dark channel prior, CLAHE, and bilateral filters.

### Design and Implementation of Adaptive Filters

The adaptive filtering part of the technique is executed when the dark channel priories of the picture have been correctly determined. This part is crucial since it improves the dark channel priori-based image's characteristics and helps the rest of the algorithm work better. As a general rule, a filter is said to be adaptive if it can change its filtering parameters (coefficients) over time to accommodate changes in picture dynamics. A self-learning adaptive filter is required to accomplish this objective. The adaptive filter coefficients may optimise the input picture as it passes through the filter, whether that's by removing noise or recognising a previously unseen filter component. In order to create filters that work as adaptive filers as well as possible, it is necessary to consider certain filter features. Below, we provide a concise overview of these benchmark qualities.

#### How Fast the Filter Converges:

The transition time between the initial state of the filter and its final state is defined by the convergence rate. The ideal feature of an adaptive system is often one with a higher convergence rate. On the other hand, convergence rate does not exist in a vacuum apart from the other metrics measuring performance. An improvement in convergence rate will come at the expense of other performance metrics, while an increase in other metrics will lead to a fall in convergence performance. To illustrate the point, the stability characteristics will deteriorate when the convergence rate is raised, increasing the likelihood that the system would diverge rather than converge to the correct solution.

### CONCLUSION

An important advancement in the field of image dehazing, this work examines current dehazing algorithms that use the Dark Channel Prior method. The whole process of removing picture haze was tedious and time-consuming because of the complicated post-processing processes used in conjunction with Dark Channel. The article brought to light some facts and adjustments that are expected to improve the virtual image's statistical properties, such as Mean, Variance, Entropy, and so on.

### REFERENCES

- [1]. S.-R. Kuang and J.-P. Wang, "Design of power-efficient configurable booth multiplier,"IEEE Trans. Circuits Syst. I, Reg. Papers, vol. 57, no. 3, pp. 568–580, Mar. 2010.
- [2]. W. Ling and Y. Savaria, "Variable-precision multiplier for equalizer with adaptive modulation," in Proc. 47th Midwest Symp. Circuits Syst., vol. 1. Jul. 2004, pp. I 553–I556.
- [3]. Xilinx Inc.: XAPP 290: Two flows for Partial Reconfiguration: Module Based or Difference Based. [www.xilinx.com](http://www.xilinx.com), Sept. (2004).
- [4]. O. A. Pfander, R. Hacker, and H.-J. Pfliederer, "A multiplexer-based concept for reconfigurable multiplier arrays,"in Proc. Int. Conf. Field Program. Logic Appl., vol. 3203. Sep. 2004, pp. 938–942.
- [5]. H. Lee, "A power-aware scalable pipelined booth multiplier," in Proc. IEEE Int. SOC Conf., Sep. 2004, pp. 123– 126.
- [6]. Mesquita, D., Moraes, F., Palma, J., Moller, L., Calazanas, N.: Remote and Partial Reconfiguration of FPGAs: tools and trends. International Parallel and Distributed Processing Symposium,(2003).
- [7]. Meyer-Baese, U.: Digital Signal Processing with Field Programmable Gate Arrays.





Springer, (2001).

[8]. Xilinx Inc.: Development System Reference Guide. [www.xilinx.com](http://www.xilinx.com).

[9]. A. Bermak, D. Martinez, and J.-L. Noullet, "High density 16/8/4-bit configurable multiplier," Proc. Inst. Electr. Eng. Circuits Devices Syst., vol. 144, no. 5, pp. 272–276, Oct. 1997.

[10]. M. Hatamian and G. L. Cash, "A 70 MHz 8 bit x 8 bit parallel pipelined multiplier in 2.5  $\mu\text{m}$  CMOS," IEEE Journal of Solid-State Circuits, vol. 21, no. 4, pp. 505–513, 1986.

[11]. Yeong-Jae Oh, Hanho Lee, Chong-Ho Lee, "A Reconfigurable FIR Filter Design Using Dynamic Partial Reconfiguration", IEEE, vol-06, pp. 4851–4854, ISCAS 2006.

[12]. S.Karthick, Dr. s. Valarmathy and E.Prabhu, "RECONFIGURABLE FIR FILTER WITH RADIX-4 ARRAY MULTIPLIER", jatit, Vol. 57 No.3, pp.326-336, Nov.2013.

[13]. K.Anandan and N.S.Yogaanath, "VLSI Implementation of Reconfigurable Low Power Fir Filter Architecture", IJIRCCE, Vol.2, Special Issue 1, pp no 3514-. 3520, March 2014.

[14]. Martin Kumm, Konrad Moller and Peter Ziefel, "Dynamically Reconfigurable FIR Filter Architectures with Fast Reconfiguration", IEEE Journal of Solid-State Circuits, vol. 41, no. 4, April 2006.

[15]. Pramod Kumar Meher, Shrutisagar Chandrasekaran, and Abbes Amira, "FPGA Realization of FIR Filters by Efficient and Flexible Systolization Using Distributed Arithmetic", IEEE Transactions on Signal Processing, pp no-1-9.

[16]. Xiaoxiao Zhang, Farid Boussaid and Amine Bermak, "32 Bit $\times$ 32 Bit Multiprecision Razor-Based Dynamic Voltage Scaling Multiplier With Operands Scheduler", IEEE Transactions on Very Large Scale Integration (VLSI) Systems, vol. 22, no. 4, April 2014.

[17]. K.Gunasekaran and M.Manikandan, "High Speed Reconfigurable FIR Filter using Russian Peasant Multiplier with Sklansky Adder", Research Journal of Applied Sciences, Engineering and Technology 8(24): 2451-2456, 2014.

[18]. Shidhartha Das, David Roberts, Seokwoo Lee, Sanjay Pant, David Blaau, Todd Austin, Krisztián Flautner and Trevor Mudge, "Self-Tuning DVS Processor Using Delay-Error Detection and Correction", IEEE Journal of Solid-State Circuits, vol. 41, no. 4, April 2006.

[19]. J Britto Pari, et al., "Reconfigurable Architecture Of RNS Based High Speed FIR Filter", Indian Journal Of Engineering And Material Sciences, pp . 230-240, vol.21, April 2014.